

## Installation Instructions

### FX Back Box

### Please Save These Instructions


- 1** Locate the desired location for your unit.
- 2** The complete unit weighs approximately 14 pounds (including the back box) it should be supported on both sides with screws, so you need to provide a header on both sides of the back box.
- 3** Mount the back box so that the front edge will be flush with the joist (studs) secure with appropriate size screws in all 4 holes.
- 4** Run your rough in wiring to the box.
- 5** Back box installation complete, finish ceiling as normal.



FX Back Box



**Parts Included**  
Back Box (1)

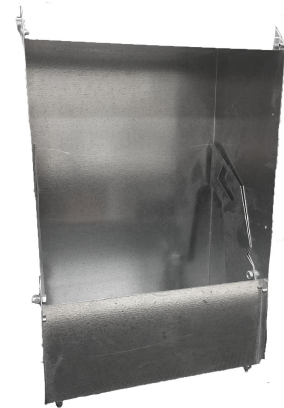

**Materials Required**  
Four Mounting Screws  
(Not Supplied)

## Limited Warranty

All Concealite fixtures are tested and are guaranteed to be free from defective materials and workmanship for a period of three years from date of shipment under normal operations and proper use. Correction of all defects shall be by replacement or repair (at our option) and shall constitute fulfillment of all manufacturer's obligations. We will not allow any charge for labor, materials, etc. that does not have our written approval before the work is begun. Damage incurring in handling or in transit are not covered by this guarantee. Any other warranty, expressed or implied, is hereby void. Modifications to the product or failure to follow installation instructions will void the warranty.